



## L-FRA100

### Low Profile Self-Attaching Lite Kit for 1 3/4" Door with 3/16" or 1/4" Glass

#### STANDARD FEATURES


- \* 20 ga. cold rolled steel
- \* Mitered and welded corners
- \* Welded reinforcing clips at corners
- \* Counter-sunk mounting screw-holes
- \* #8 x 3/4" Phillips head SMS
- \* Available in uneven and fractional sizes
- \* Standard finish = (GPZ) Gray Primer

#### OPTIONAL FEATURES


- \* See page L2 for optional finishes
- \* Torx Security Screws
- \* Galvanneal - A40 Steel
- \* Zinc electro-plating
- \* Glass & Glazing tape (Pages L23-L27)
- \* Lead lining

#### UL10C POSITIVE PRESSURE FIRE-RATED

- \* Fire-rated 1/4" wire glass:  
20 min. requires closed cell PVC foam glazing tape like NGP GT-I16.  
45, 60, 90 min. requires NGP 9800 or 3M GIS intumescent glazing tape.
- \* Fire-Lite® NT, or Fireglass 20™  
requires closed cell PVC foam glazing tape like NGP GT-I16 or GT-I18.

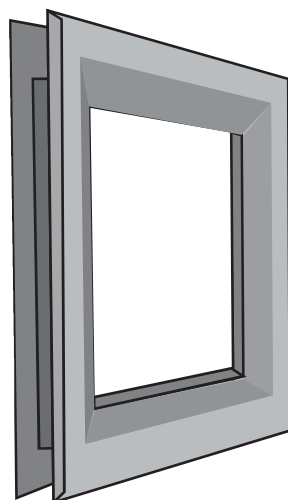

Designed for use on 1 3/4" thick doors manufactured within door industry tolerance of +/- 1/16".

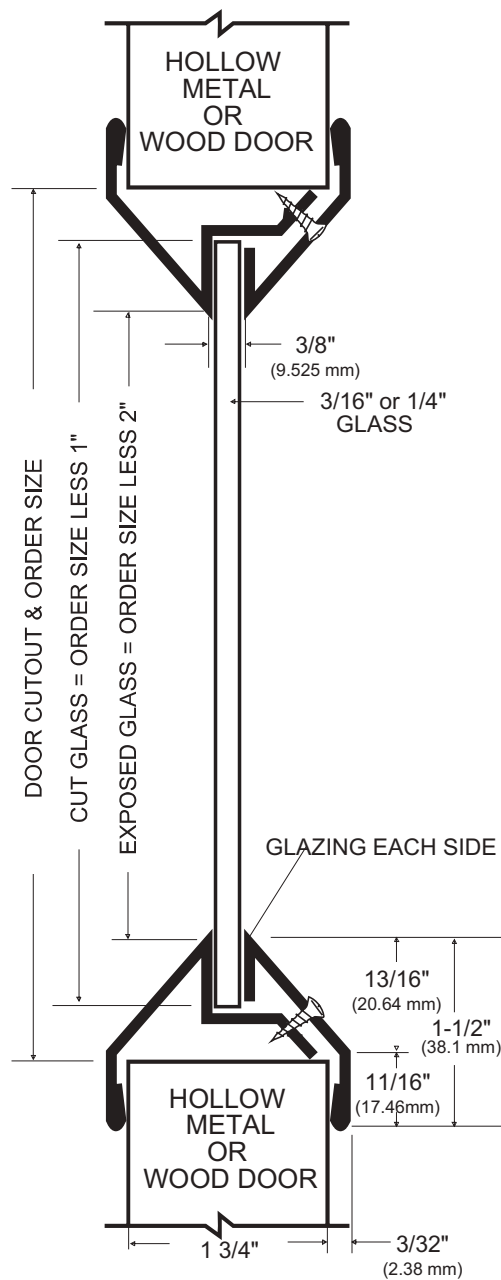

not to scale

