

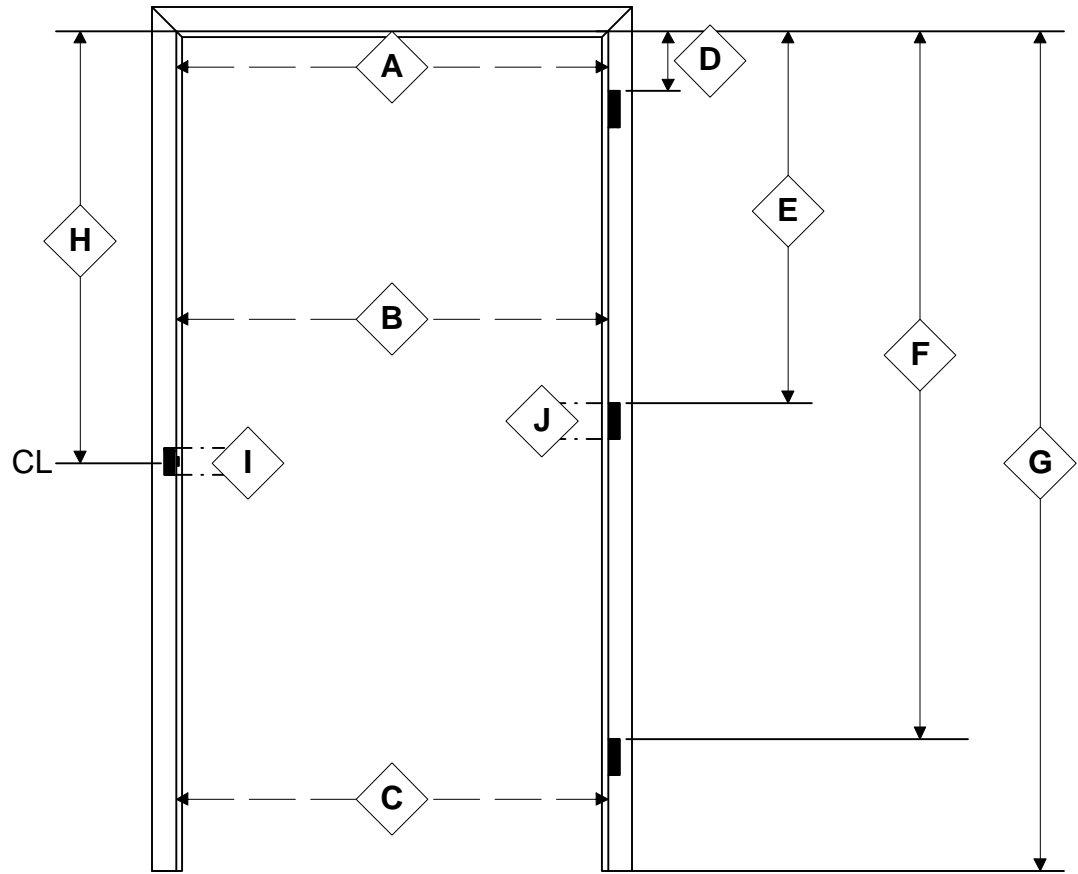



# Replacement Door To Fill Existing Frame

- Fill In All Dimensions In Fractions (1/32) As Accurately As Possible
- Check Frame For Plumb And Square
- Use Steel Rule Or Steel Tape. We Do Not Recommend Folding Rulers.



- \_\_\_\_\_ A - Frame Width Top
- \_\_\_\_\_ B - Frame Width Middle
- \_\_\_\_\_ C - Frame Width Bottom
- \_\_\_\_\_ D - Top Of Frame To 1st Hinge
- \_\_\_\_\_ E - Top Of Frame To 2nd Hinge
- \_\_\_\_\_ F - Top Of Frame To 3rd Hinge
- \_\_\_\_\_ G - Top Of Frame To Floor
- \_\_\_\_\_ H - Top Of Frame To Center Of Strike
- \_\_\_\_\_ I - Strike Plate Height
- \_\_\_\_\_ J - Hinge Height
- \_\_\_\_\_ K - Hinge Backset
- \_\_\_\_\_ L - Hand / Swing
- \_\_\_\_\_ M - Door Thickness

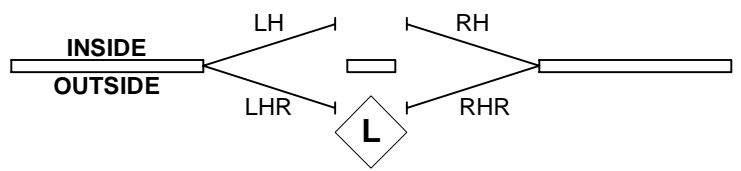

JOB NAME
DOOR LOCATION



# BEACON METALS, INC.

2770 SOUTH WEST TEMPLE SLC, UT 84115 (801) 486-4884, FAX (801) 485-7647